


ELECTRIC & HYDRAULIC VALVES | GEM & G75

G75-S | 3 Way Integral solenoid pilot control 3/4" - 2" NC



Upstream pilot control

External pilot control

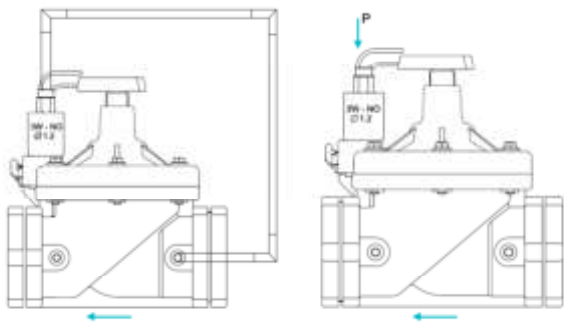

Upstream pilot control

External pilot control

Technical Data

Solenoid	Supplied with 3W NO 12mm G75 operator
Assembly	Upstream pilot control valve is supplied with finger filter and accessories

• For technical information, refer to page 56

How to Order

G75-S	PORT	FUNCTION	MANUAL OVERRIDE	FLOW CONTROL	VOLTAGE	WIRES
	3/4" BSP 50	External pilot 4	None 0	with 5	24V AC 1	two null
	3/4" NPT 51	Upstream pilot 4H	Plastic 1	without ⁽¹⁾ 6	24V AC w/out Diode 1R	three ⁽²⁾ a
	1" BSP 60		Handle ⁽²⁾ 2		12 V AC 3	
	1" NPT 61				12 V DC 4	
	1-1/2" BSP 70				24V DC 5	
	1-1/2" NPT 71				24 Latch (23Ω) 6	
	2" BSP 80				6 Latch (4Ω) B	
	2" NPT 81				12 Latch (9Ω) C	
					16 Latch (12Ω) D	

Example : G75-S-704151

G75 1-1/2" BSP, external pilot, plastic manual override, with flow control 24V AC, two wires.

G75-S - 70 4 1 5 1

(1) For 3/4", 1" valves only
(2) For Latch only

* To order valves manufactured according to your specific requirements, please contact our technical sales department.